




GV60 / 2023+

Vehicle Identification/Recognition



Accessing Vehicle

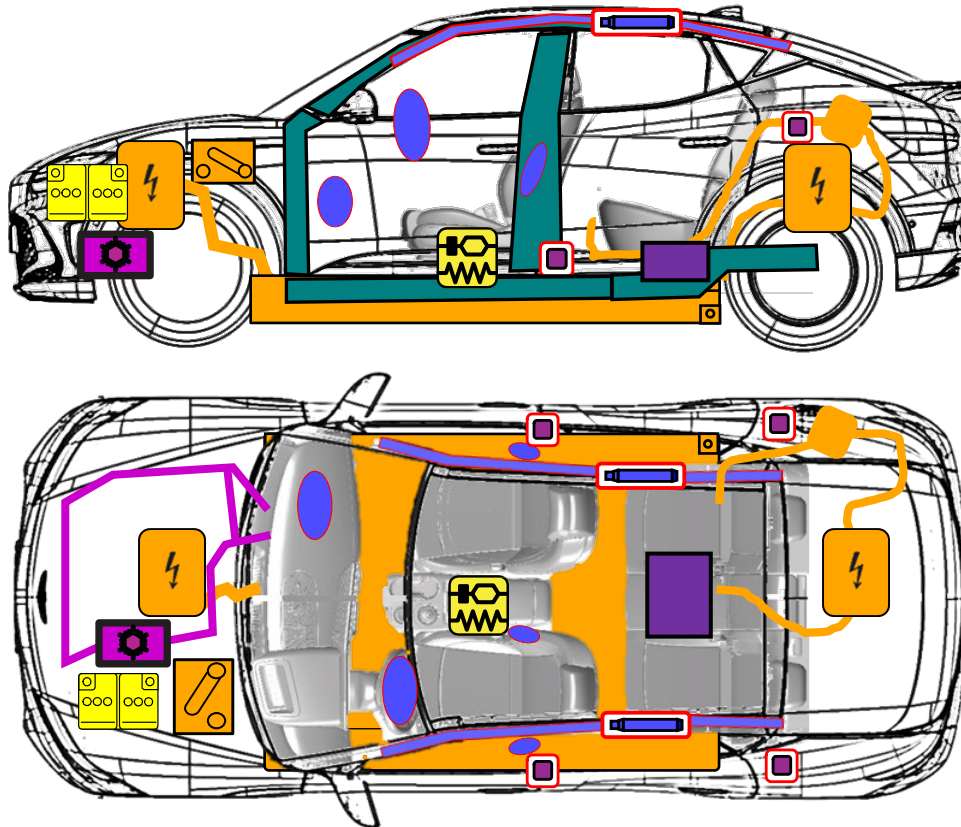

Supplemental Restraint System Control Module (SRSCM)	Airbag	Airbag Gas Inflators
High voltage cable	12V Battery	Air-conditioning line
High voltage disconnect	OBC (On – Board Charger)	Ultra-High Strength Steel
High Voltage Battery	Air-conditioning component	Seat belt pretensioner
Motor Drive Unit		



GV60 / 2023+

Disabling Vehicle

1 FRONT TRUNK (UNDER)
A

2 5m (16.4ft) or more
To Prevent Accidental Restart

3 1) Remove clip
2) Remove cover
3) Disconnect 12V
4) Wait 5 minutes

OR


1

2 5m (16.4ft) or more
To Prevent Accidental Restart

3 Remove cover (A)
Disconnect High Voltage System by removing fuse with yellow tab, then wait 5 minutes

Vehicle Towing Information

Tow the vehicle using a flat bed or using wheel dollies. Never tow the vehicle with the front or rear wheels on the ground



For further information, please refer to the Emergency Response Guide (ERG).

Applicable to GV60 vehicles first sold in the United States.	ID. No.	Version No.	Page
	KMH-JW	2023.02.21	2 of 2